

## Design Features

- Leak Integrity  $1 \times 10^{-9}$  sccm.
- Rigid metallic construction.
- Gas and liquids.
- Max pressure of 500psig (34.8 bars).

## Principle of Operation

A variable stroke electromagnetic valve featuring a valve seat design which permits increasing or decreasing flow rates of liquids or gases through it in proportion to variable input power.

## Regulator Systems

Complete flow regulating systems include a PSV electromagnetic valve connected to a pulse width modulated PSV-D Driver Module. For details see Driver Module description. Optional external RS-232 or RS-485 modules are available. (See page 9).

## Specifications

- Power Input:** 0-30Vdc.
- Max. Power Required:** 400 mA.
- Type of Operation:** Normally closed (NC) when deenergized.
- Connections:** 1/4" Compression fittings optional 1/8" and 3/8".
- Dimensions:** 3.45" (87.6mm) high x 3.25" (82.6mm) long (including compression fittings) x 1.00" (25.4mm) deep.
- Materials in Fluid Contact:** Types 316 and 416 stainless steel, Viton® O-rings.
- Max Pressure:** 500 psig (3448 kPa).
- Max Diff. Pressure:** 50 psid (345 kPa).
- Leak Integrity:**  $1 \times 10^{-9}$  smL/sec Helium individually tested.
- Max. Temp.(typ.):** 174°F (79°C) inside, 130°F (54°C) outside surface at 24Vdc.



PSV Proportionating Electromagnetic Valves are designed to respond to variable power inputs to regulate the flow of liquids and gases proportionately.

For added safety PSV valves are normally closed (NC) when deenergized. They can also serve as "ON-OFF" valves. For control functions see the PSV-D Driver Module.

Flow is controlled by increasing or decreasing the voltage applied to the coil. This causes a magnetic force which raises the core and allows gas to flow.

PSV valves, constructed of stainless steel are available in five different sizes covering flow ranges from 3.5 sL/min - 100 sL/min air and 125 mL/min - 2.85 L/min H<sub>2</sub>O.

## Dimensions

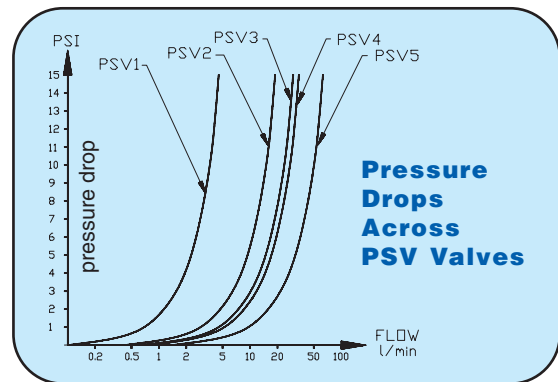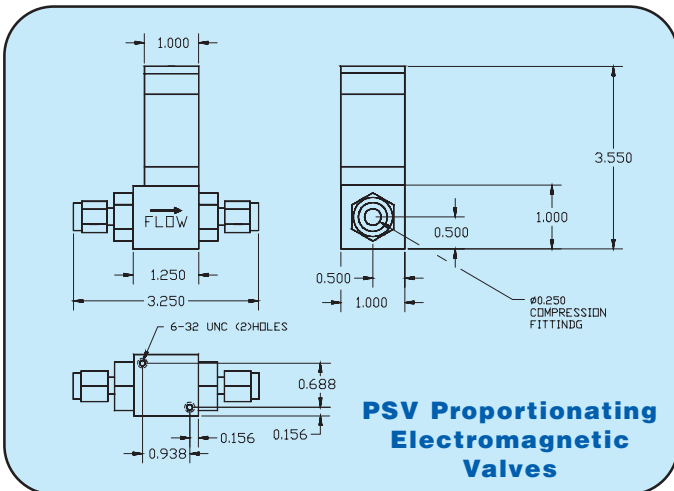

**TABLE 27 - PSV Valve Max Flow Rates and CV Values**

Model Number	Orifice Size		Cv	*Maximum Flow [mL/min]	
	[in]	[mm]		Air	Water
PSV-1	0.02	0.51	0.009	3500	125
PSV-2	0.04	1.02	0.033	13000	400
PSV-3	0.055	1.4	0.055	21500	700
PSV-4	0.063	1.6	0.068	25000	850
PSV-5	0.125	3.18	0.24	100000	2850

\*Based on 10 psig (690 mbar) differential pressure

MODEL	SERIES	MATERIAL	SEALS	FITTINGS
PSV	1 2 3 4 5	S Stainless	V Viton® B Buna E EPR T PTFE/Kalrez	A 1/4" Compression B 1/8" Compression D 3/8" Compression X Special

**EXAMPLE: PSV4S-VA**  
PSV4 Stainless, Viton® seals with 1/4" Compression fittings.

**ORDERING INFORMATION FOR PSV VALVES**

## PSV-D

Pulse width modulated PSV-D Driver Modules regulate the power supplied to PSV Regulating valves based on a reference signal.

Set-point signals, 0 - 5 Vdc or 4 - 20 mA, input are employed to control the output pulse width modulated voltage at a fixed frequency ( $\approx 30\text{KHz}$ ) and amplitude. Incoming power to the valve coil is applied and discontinued for predetermined periods of time by a low loss solid state switching element.

As incoming power is applied, energy in the inductive coils increases and when it is discontinued energy stored in the coil maintains the magnetic flux level required to hold flow at the controlled rate. This cycle takes place many thousands of times per second.

The wide range of power input feature conveniently accommodates 12 to 32 Vdc sources.

The Auto-Select feature of the Driver Module recognizes the type of reference signal received and defaults to 0 - 5 Vdc if both signals are provided.



**Pulse Width Modulated Driver Module shown with PSV valve**

Jumper selectable output power allows a choice of dc voltage range for cooler more efficient operation, as a function of flow rates.

Internal resettable fuse protects electronics and rectifier circuits, prevents polarity reversal damage.

The maximum output voltage supplied to the PSV Valve can be set or changed in the field to allow for optimal use of the input reference signal to output voltage based on the specific flow rate and operating pressure applied to the valve.

## Specifications

**Connection:** 9-pin male "D" subconnector for input/output signals.

**Power Input Required:**

+12 to 30 Vdc 1A @ 12 Vdc, 0.5A (not supplied)  
@ 24 Vdc via 9-pin "D"-connector or dc power jack (center positive).

**Input signal:** Auto-Select feature allows circuit to recognize which analog input reference (0 to 5 Vdc or 4-20 mA) signal is provided.

**TTL On/Off:** Jumper selectable LOW (0 Vdc) OFF-HIGH (5 Vdc) on, or reverse, to select valve ON/OFF status.

**Valve Output Power:**

Jumper selectable to +15, +22, and +29 Vdc with adjacent potentiometer to obtain  $\pm 2$  Vdc.

**Fuse Rating:** An internal resettable 1.6A fuse protects the electronics on the power input.

**Polarity Protection:**

Internal rectifier circuit protects from reversed polarity on the power input.

**Operating Temperature:**

0°C (32°F) to 50°C (122°F).

**Dimensions:** 3" (7.62mm) wide x 3" (7.62mm) deep x 1" (25.4mm) high.

**CE Compliance:**

EMC Directive 89/336/EEC EN55011:1991 Group 1, Class A EN50082-2:1995.

### Ordering Information for PSVD

PSV-D	Proportionating Solenoid Valve Driver
Accessories for for PSVD Driver Module	
PS-PSV-110NA-4	Power Supply, 110vac/24 Vdc /North America
PS-PSV-230EU-4	Power Supply, 230vac/24 Vdc /Europe
PS-PSV-240AU-4	Power Supply 240vac/24 Vdc /Australia
PS-PSV-240UK-4	Power Supply 240vac/24 Vdc /United Kingdom
CBL-DP9-6	Female 9 pin D-connector with 6 ft.cable

