


MODEL H-100F 面積式流量計

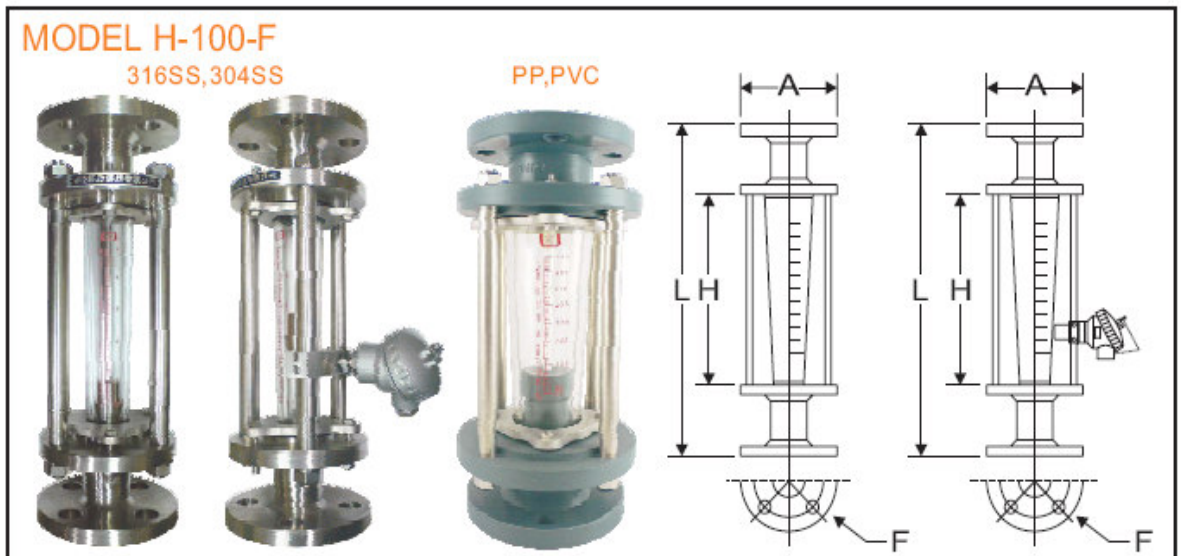

DIMENSIONS		FS	FW	FI	FV	FP	FD	m/m					
MODEL		10	15	18	20	25	32	40	50	65	80	100	125
L		260	260	260	340	340	340	340	340	410	430	440	
H		150	150	150	200	200	200	200	200	250	250	250	
A \varnothing		90	95	95	100	125	135	140	155	175	185	210	250
F		3/8	1/2	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4	5

STANDARD FLOW RANGE

FLUID SIZE	RANGE			
	WATER		AIR	
	L/MIN.	NL/MIN.	L/MIN.	NL/MIN.
10	1	0.03-0.3	3	0.08-0.8
	2	0.05-0.5	4	0.1-1.0
15	1	0.1-1.0	3	0.3-3.0
	2	0.2-2.0	4	0.4-4.0
18	1	0.5-5.0	3	1-10
	2	0.6-6.0	4	1-15
20	1	1-10	3	2-20
	2	1-15	4	3-30
25	1	3-30	3	5-50
	2	4-40	4	8-80
32	1	5-50	3	10-100
	2	8-80	4	12-120
40	1	10-100	3	20-200
	2	15-150	4	25-250
50	1	15-150	3	25-250
	2	20-200	4	30-300
65	1	30-300	3	50-500
	2	40-400	4	60-600
80	1	50-500	3	80-800
	2	60-600	4	100-1000
100	1	80-800	3	120-1200
	2	100-1000	4	160-1600

MATERIALS				
BODY	FLOAT	TUBE	SEAL	ALARM
S SS304	S SS304	G GLASS	N NEOPRENE	N NO
W SS316	W SS316	P P.C (POLY CARBONATE)	V VITON	H HI
I C.S	T TEFLON	T TEFLON	L LO	
V P.V.C	V P.V.C		A HILO	
LINING BODY				
D P.V.D.F	D P.V.D.F	N NO	T TEFLON	
P P.P	P P.P	O OTHERS		
C C.P.V.C	N NYLON			
O OTHERS	C C.P.V.C			

SPECIFICATIONS							
MODEL	FS	FW	FI	FV	FP	FD	FO
MAX.TEMP	100°C		50°C	80°C	100°C	OTHER	
MAX.PRESS	10kg/cm ² G		6kg/cm ² G		OTHER		
CONN.FLANGE	J JIS 10K	A ANSI 150LB	D DIN PN16	OTHER			
ACCURACY	WATER 2% F.S		AIR 3% F.S				
GLASS	TEMP.100°C		PRESS 4-6kg/cm ² G				
POLY CARBONATE	TEMP.100°C		PRESS 6-12kg/cm ² G				

NOTE: 1.0 OTHERS FLOW RANGE
2.H-100F 型流量計是直接垂直安裝於管路上，流體底部進，上部出。

歡迎訂製各式特殊流量計，敬請惠予告知下列之條件：

1. 型式 (Model)
2. 流體 (Fluid)
3. 材質 (Material)
4. 流量範圍 (Flow Range)
5. 接續方式 (Connection)
6. 操作壓力 (Operating pressure)
7. 操作溫度 (Operating temperature)
8. 濃度及黏度 (Concentration & Viscosity)
9. 比重或密度 (Specific Gravity & Density)

